

Mounque Barazone's • GAC® Geotextile Apparatus Company

Taking the labor out of unloading & installing Geosynthetics for 39 years!

© COPYRIGHT 1981 - 2018 and Present, Mounque Barazone and Geotextile Apparatus Company, ALL RIGHTS RESERVED

ROLL PULLER™ • Multiple Patent's Pending Models RP3XL & RP4XL

New Longer Patents Pending • Body • TEETH • SHAFT • FORGED RING

- Now 16 inches long, 4 inches longer than the previous 12 inch models developed in 1980
- Grabs Deeper in the cardboard core to help prevent the cores from tearing.
- New Design Laser Special Steel Notched Teeth.
- New Forged Ring, threaded onto the Shaft & double welded.

RP3XL (2.75"-3.25" ID Cardboard Cores) \$495 each

RP4XL (3.75"-4.50" ID Cardboard Cores) \$475 each

Price effective 7/23/2018

Plus \$20 handling per shipment and Freight charges prepaid or billed to your freight account.
Credit Cards on small orders No discount. - Credit Terms of 2% 5 Net 30 to established accounts.




2 Photos Courtesy of
MACCAFERRI of BOLIVIA LTDA.

Insert Roll Pullers in cores.
Pull horizontally with an upward lift relieving
pressure on the rolls beneath.

This permits rolls to easily
slide on the rolls beneath.

Never pull on a downward angle
with pressure into the rolls beneath
this prohibits the rolls from sliding.

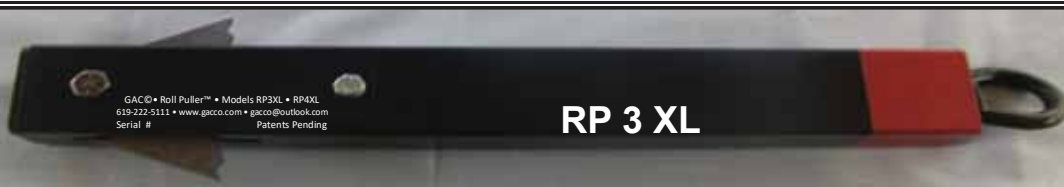

GAC® Roll Puller™ • Models RP3XL • RP4XL
619-222-5111 • www.gacco.com • gacco@outlook.com
Serial # Patents Pending

RP 3 XL



GAC® Roll Puller™ • Models RP3XL • RP4XL
619-222-5111 • www.gacco.com • gacco@outlook.com
Serial # Patents Pending

RP 4 XL

Since 1980 millions of Geosynthetic rolls on cardboard cores have been unloaded safely, easily and less costly from enclosed vans and containers. **Protects laborers** from back and other injuries and protects the employer from workers compensation & disability claims.

Eliminates most of the manual labor needed to unload rolls or carry rolls from the back to the front of the van or container. **Roll Pullers pay for themselves in just a few shipments:**

Multiple Roll Pullers can unload trucks and containers as much as 10 times faster depending on roll diameter, rolls in a row and weight. Heavier weight and banded synthetics will reduce the number of rolls that can be unloaded per pull. As many as three rows can be pulled on one pull varies depending on the manufacturer's process for winding the synthetic onto the cardboard core. If the core begins to pull out reduce rows.

**90 DAY WARRANTY AGAINST DEFECTS FROM DATE OF PURCHASE
WITH PROPER USE. PLEASE SEE PAGE 2 FOR INSTRUCTIONS.**

WE STOCK CHAIN, HOOKS & O-RINGS FOR COMPLETE SYSTEMS:

4" Forged Steel O-Ring - WLL 4700 LB \$28.00 each

5/16" Grade 70 Chain - WLL 4700 - 4 feet - \$16.00 each • 6 feet- \$24.00 each

Grade 70 HOOKS - WLL 4700 LB - Slip Hook \$15.00 & Grab Hook \$10.00

\$10 PER CHAIN LABOR TO CUT CHAIN AND INSTALL HOOKS

WLL - WORKING LOAD LIMIT - IS LESS THAN THE BREAKING STRENGTH

OSHA REGULATIONS - NEVER EXCEED THE WLL - WORKING LOAD LIMIT



**PLEASE!!
THINK SAFETY**
**ROLL PULLERS DO NOT BREAK
WITH PROPER USE (SEE PAGE 2)
CHAINS, CABLES, ROPES
& SLINGS DO BREAK**
**PERSONNEL WILL ENJOY WATCHING
HOW FAST & SAFELY ROLL PULLERS
UNLOAD TRUCKS & CONTAINERS
& NOT USE THEIR COMMON SENSE!
ALL PERSONELL SHOULD STAND
CLEAR & NOT NEAR THE SIDE
OF THE ROPES, SLINGS, CABLES
OR CHAINS IN CASE THEY BREAK.
PLEASE SEE PAGE 2 FOR USAGE
& SAFETY INSTRUCTIONS.
MAXIMUM LOAD IS 1000 POUNDS.**

Mounque "Monk" Barazone also
Patented & has Manufactured for 35
years "The Worlds Best" Telescoping
Paving Fabric Installation Machines
The Grizzly 600T
& Grizzly Cub 300T



2 Puller set uses 2 - 6' chains
3 Roll Puller set uses:
1 - 4' center & 2 - 6' outer chains
4 Puller set uses: 2 of each 4' & 6'




Phone & Fax 619-222-5111 • Email: gacco@outlook.com • Website: www.gacco.com

© COPYRIGHT 1981 - 2018 and Present, Mounque Barazone and Geotextile Apparatus Company, ALL RIGHTS RESERVED


Used by Contractors, Distributors, Manufacturers & Truckers since 1980.

The PATENTS PENDING ROLL PULLER™ can pull up to a maximum 1000 pounds each used correctly to unload trucks, containers or other to the ground, existing piles of synthetics, onto a forklift or a loading dock.

© COPYRIGHT 1981 - 2018 and Present , Mounque Barazone and Geotextile Apparatus Company, ALL RIGHTS RESERVED

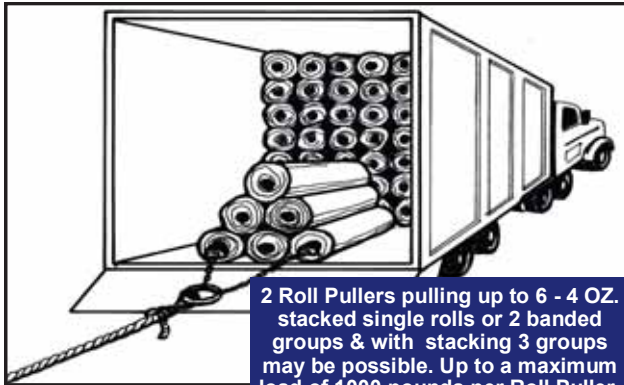

2 Roll Pullers pulling up to 6 - 4 OZ. stacked single rolls or 2 banded groups & with stacking 3 groups may be possible. Up to a maximum load of 1000 pounds per Roll Puller.

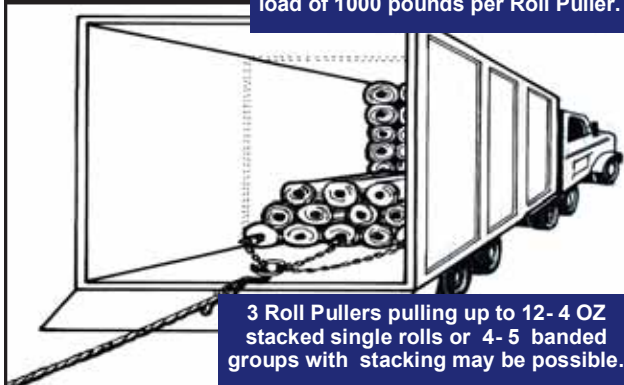

3 Roll Pullers pulling up to 12- 4 OZ stacked single rolls or 4- 5 banded groups with stacking may be possible.

Directions For Use:

- 1 - Attach a pulling rope, strap, cable or chain to the **Roll Puller™** ring..
- 2 - Insert the **Roll Puller™ RP3XL (2.75" - 3.25")** or **RP4XL (3.75" - 4.5")** into the roll cardboard core leaving the red tape line exposed (about 2").
- 3 - Holding the **Roll Puller™** pull the ring back locking the teeth into the cardboard core. Tug on the rope or chain to make sure the **Roll Puller** teeth are set and biting into the cardboard core and will not come out.
- 3 - **For Multiple Roll Pullers**, attach short class 80 or 100 OSHA approved chain for lifting with hooks to the **Roll Pullers** and then to a heavy Steel O- Ring. Attach 65' minimum 5000 LB - 1" rope (strap, cable or chain) to the O- Ring.
- 4 - Pull on the rope with available equipment (forklift, end loader, pickup truck, etc.).
- 5 - Pull rolls horizontally or with a slight upward lift. This reduces pressure and drag and permits the rolls to slide easily on the rolls beneath those being pulled.
- 6 - **DO NOT pull downward on an angle.** This pulls the rolls downward into the rolls beneath and increases the pressure and drag on the load being pulled.
- 7 - When the synthetic is unloaded and the rope is slack, remove the **Roll Puller** by pushing the ring into the **Roll Puller™** while holding onto the red taped part to release the teeth from the core. Slide the **Roll Puller** out of the core.
- 8 - **When using Multiple Roll Pullers** rolls can be pulled one at a time, in banded multiples or in stacked rows depending on weight and the corer not pulling out.
- 9 - If the core tears or begins to pull out reduce the weight or move up a row. 1, 2 or 3 rows (in height) of synthetics can be unloaded with one pull depending on the product's roll weight and manufacturers winding process on the core.
- 10 - **THINK SAFTEY at all times. Personnel should wear hard hats, steel toed shoes, eye protection, gloves and have retractable blade slit knives for cutting bands. All personnel should stand clear, far enough away from the rope and to the side of the truck or container. NEVER STAND along the level of the rope being pulled in case the rope breaks. THINK SAFTEY.**




4 or 5 Roll Pullers pulling 21 - 4 OZ. single rolls, 3 rows of 7 or 4 - 7 banded groups with stacking. The number of rows and stacking will vary depending upon the manufacturers winding process on the core. Maximum load per Roll Puller is 1000 pounds. used correctly.

THINK SAFTEY

PERSONEL SHOULD NEVER STAND ALONG THE ROPE OR WHERE ROLLS FALL

**SAFETY ZONE
STAND HERE**

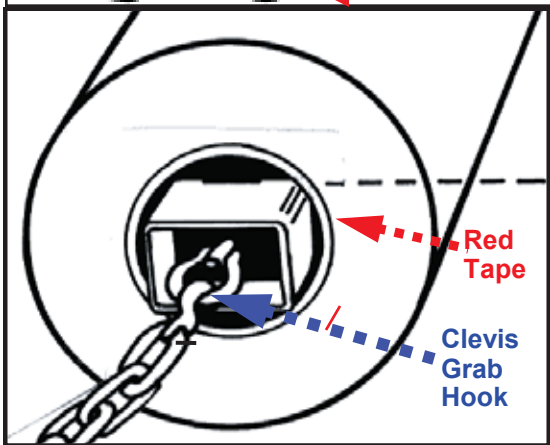

RAISE THE LIFT TO PULL HORIZONTALLY OR WITH A SLIGHT UPWARD LIFT

PULL HORIZONTALLY OR WITH A SLIGHT UPWARD LIFT.

This reduces pressure on the rolls beneath those being pulled and allows the roll to slide easily out.

NEVER PULL DOWNWARD ON AN ANGLE or TUG.

This increases the PSF load and can exceed 1000 pounds. It forces the rolls into the rolls beneath reducing slide and requiring tugging and jerking. This will damage the roll puller. **Downward pulling flexes the ring and shaft juncture and weld. It will eventually create stress fractures which will shear the joint and shaft. It voids the warranty.**

Tugging can tear the cardboard core. Horizontal or an upward lift pulling speeds up the unloading process and decreases unloading time and costs.

Insert the Roll Puller into the core up to the Red Tape end leaving the tape, ring, hook and chain exposed out of the core.

Unloading rolls is fast, easy and safe including pulling rolls wedged on the top or from deep in the rear of the enclosed vans

Mounque "Monk" Barazone ■ GAC® Geotextile Apparatus Company

Phone & Fax 619-222-5111 ■ Email: gacco@outlook.com ■ http:// www.gacco.com

© COPYRIGHT 1981 - 2018 and Present , Mounque Barazone and Geotextile Apparatus Company, ALL RIGHTS RESERVED